


TYPE: Turbocharged/VERTICALLY ORIENTED CONFIGURATION: VERTICAL IN LINE No. OF CYLINDERS: 4
 BORE: 84.5 mm 3.327 in STROKE: 88.9 mm 3.5 in CUBIC CAPACITY: 1.994 litre 121.7 in³
 V DENOTES 12% ± 2% GOVERNING

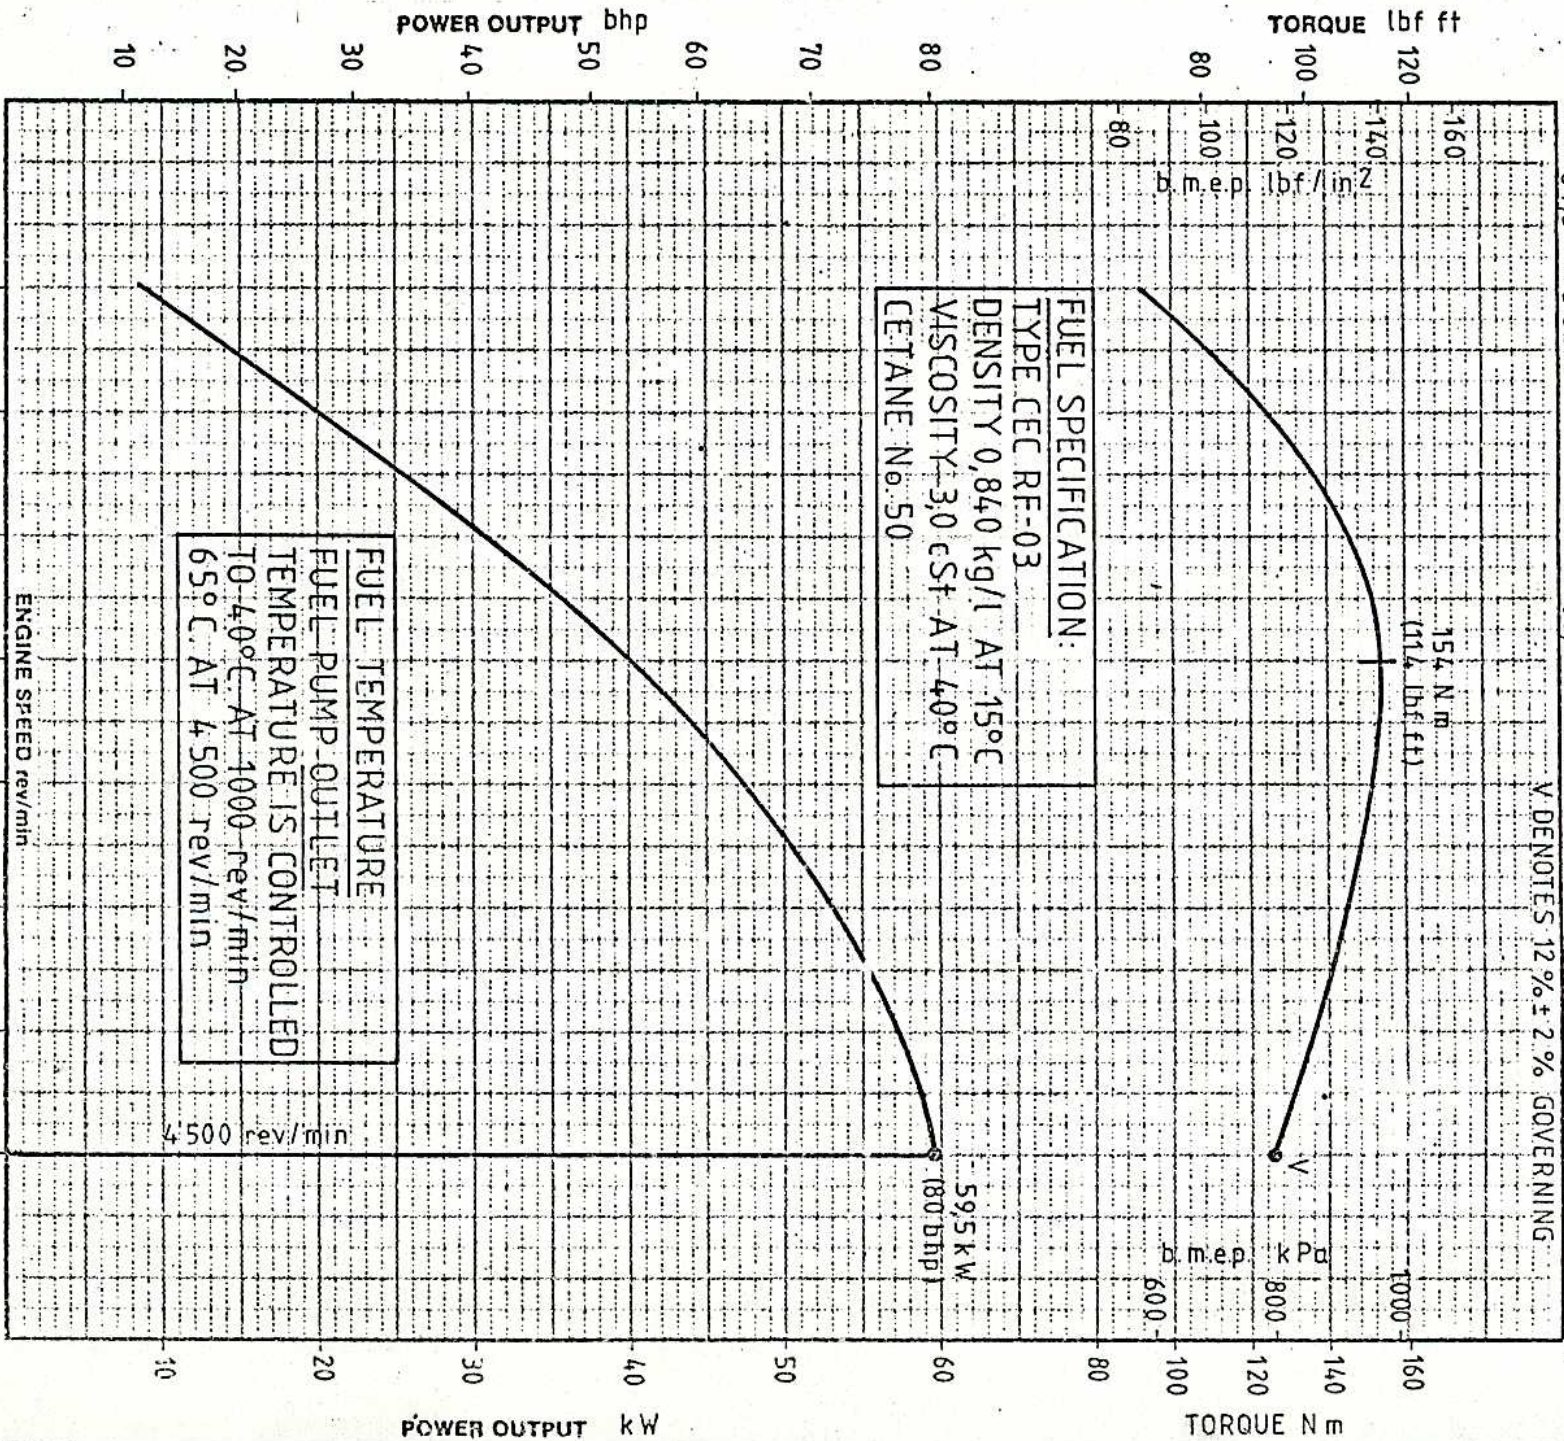

Power output from a run-in engine (30 to 60 hrs running)

EXHAUST GAS PRESSURE AT 0.2 METER FROM EXHAUST MANIFOLD
 Lubricating oil viscosity 15W/40

Auxiliaries fitted to engine

Exhaust quality target/limit

SMOKE: E.C. 72/306
 LIMIT AT 100% LOAD

Rating standard	BS AU141a:1971
Total barometric pressure	101.3 kPa
Vapour pressure of relative humidity	-
Air inlet temperature	20°C
Nominal tolerance on power output	+0-5%
Maximum inlet restriction	6.0 kPa

Authorised signature